



Confidential Report

Our Ref: 27/06730/03/25





Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25

Your Ref: -

Page: 1 of 15

Client:

All Print Supplies Ltd

7b Fairlie Road
Slough
Berkshire
SL1 4PY

Job Title:

Fire Test on One Sample of Window Film

Clients Order Ref:

--

Date of Receipt:

19 March 2025

Description of Sample:

One sample of window film, referenced; RG12 - 1/2" - RG Reeded Glass Effect Films .

Work Requested:

We were asked to make the following test(s):

BS EN ISO 11925-2

BS EN 13823

- * subcontracted test, UKAS accredited
- ** subcontracted test, EN ISO/IEC 17025 accredited
- *** not UKAS accredited



1066

Note: This report relates only to the items tested.

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
BTTG™ and Shirley® are trade names of Shirley Technologies Ltd.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2025 Shirley Technologies Limited. All rights reserved.



Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 2 of 15

Client: All Print Supplies Ltd

Product Data Sheet (supplied by client)

Reeded Glass Effect Films

½" reeded / fluted glass effect PET window film

Product description

50µ reeded / fluted glass effect clear polyester film with a clear solvent based acrylic removable adhesive and 20µ clear polyester release liner. Available in rolls 1520mm wide.

RG12 has a ½" patterning.

Typical uses

Suitable for both indoor and outdoor use. 1 year outdoor and a minimum of 5 years internal, vertical exposure in mid-EU climate.

Transforms windows easily and quickly to look like reeded / fluted glass.

For consistency of the finished look, when tiling these films they must be installed in the same direction.

Wet application is highly recommended for these products.

Shelf life

18 months when stored in original packaging at 21°C and 50% RH.

Physical properties (Average Values)

Film thickness:	50 microns
Adhesive / Thickness:	Clear solvent-based acrylic, removable, 15 g
Adhesion to steel:	FINAT FTM 1
20 minutes (180°) N/25mm:	8
24 hours (180°) N/25mm:	9
7 days (180°) N/25mm:	10
Product application:	
Dimensional stability (mm)	0.000mm
UVA/UVB blk	35%
Application temperature	10°C to 25°C
Service temperature	minus 30°C to 60°C



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
BTG™ and Shirley® are trade names of Shirley Technologies Ltd.

The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2025 Shirley Technologies Limited. All rights reserved.



Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 3 of 15

Client: All Print Supplies Ltd

Product Data Sheet (continued)

Additional information

Material is warranted for one (1) year from date of shipment. The shelf life of the material is dependent on storage conditions. We recommend that the end user stores the material in the original boxes (out of direct sunlight) from our factory. We also recommend to store our material at 21°C with 50% relative humidity.

Only this product is warranted to be free from defects in workmanship or defects. We will replace or credit any material deemed defective. No acceptance or responsibility for loss, damage or expense implied or otherwise shall be assumed by the seller or manufacturer. User assumes all risk and liability in connection herewith.

All data values quoted above are typical and should not be used to deem the product defective, if measured values are different.





Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 4 of 15

Client: All Print Supplies Ltd

FIRE TESTS ACCORDING TO BS EN ISO 11925-2:2020

Reaction to fire tests for building products – Part 2: Ignitability when subjected to direct impingement of flame

Date of Test: 22/04/25

Conditioning

Test specimens and filter paper conditioned as described in BS EN 13238:2010.

Mounting Method

Each specimen was mounted using the following conditions:

Method of Mounting/Fixing:	Self Adhered
Test Substrate (as specified in (BS EN 13238):	12mm Calcium Silicate Board (EN 14306)
Adhesive (if applicable):	N/A

Procedure

The sample was tested in accordance with BS EN ISO 11925-2:2020.

Three specimens from each direction were tested in accordance with the above standard. Specified filter paper was placed beneath the specimen holder and replaced between tests.

The specimens were mounted vertically in the specimen holder so that one end and both sides were enclosed with the exposed end 30mm from the end of the frame. The burner was inclined at an angle of 45°.

Face Ignition

The flame height was set at 20 mm with the flame impinging on the specimen for 30 seconds on the centre line, 40 mm above the bottom edge.



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
BTG™ and Shirley® are trade names of Shirley Technologies Ltd.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2025 Shirley Technologies Limited. All rights reserved.



Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 5 of 15

Client: All Print Supplies Ltd

Procedure (Continued)

Edge ignition

The flame was applied for 30 seconds to the centre of the width of the bottom edge of the test specimen 1.5 mm behind the surface.

A marker was placed 150 mm above the upper end of the burner and the time recorded when the flame tip reached the marker, if applicable. The following parameters were also recorded: -

1. If ignition occurs
2. Presence of flaming debris, if applicable
3. Ignition of the filter paper, if applicable

Sample was tested as an essentially flat product.

Duration of test

For a flame application time of 30 seconds, the total test duration is 60 seconds after application of the flame.

Classification Criteria

The samples were classified according to BS EN 13501-1:2018 Fire classification of Construction Products and Building Elements: Part 1 – Classification using Test Data from Reaction to Fire Tests.

Flaming Classification	
Classification	Criteria (mean values)
E	$F_s \leq 150\text{mm}$ within 60 seconds
F	Fails Class E

Flaming droplets / particles classification	
Classification	Criteria
No classification	Pass
d2	Fail (Ignition of paper)



Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
BTG™ and Shirley® are trade names of Shirley Technologies Ltd.

The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2025 Shirley Technologies Limited. All rights reserved.



Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
 Telephone: +44 (0) 113 259 1999
 Email: onestopshop@bttg.co.uk
 Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
 Your Ref: -

Page: 6 of 15

Client: All Print Supplies Ltd

Results

	Specimen		Ignition (Yes or No)	Tip of flame reaches 150mm		Flaming droplets	
				Yes or No	Time taken (s)	Yes or No	Ignition of Filter paper (Yes or No)
Face Ignition	Machine	1	No	No	N/A	No	No
	Direction	2	No	No	N/A	No	No
		3	No	No	N/A	No	No
	Across	1	No	No	N/A	No	No
	Machine	2	No	No	N/A	No	No
Edge Ignition	Direction	3	No	No	N/A	No	No
	Machine	1	No	No	N/A	No	No
	Direction	2	No	No	N/A	No	No
		3	No	No	N/A	No	No
	Across	1	No	No	N/A	No	No
	Machine	2	No	No	N/A	No	No
	Direction	3	No	No	N/A	No	No





Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 7 of 15

Client: All Print Supplies Ltd

Photograph of BS EN 13823 Specimen





Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 8 of 15

Client: All Print Supplies Ltd

FIRE TESTS ACCORDING TO BS EN 13823:2020+A1:2022

Reaction to fire tests for Building Products - Building Products excluding floorings exposed to the thermal attack by a single burning item.

Classified According to BS EN 13501-1:2018

Date of Test: 17/04/25

Conditioning

The specimens were conditioned in accordance with BS EN 13238:2010.

Principle

Test specimens, consisting of two vertical wings forming a right-angled corner, is exposed to the flames of a burner placed at the bottom of that corner. The flames are obtained by the combustion of propane gas, injected through a sandbox to give a heat output of $30.7 \pm 2.0 \text{ kW}$.

The performance of the test specimen is evaluated over a period of 20 minutes. The performance requirements are: heat production, smoke production, lateral flame spread and falling flaming droplets and particles.

The heat production is measured by use of oxygen calorimeter that uses the principle that the amount of oxygen consumed in a fire is proportional to the amount of heat produced. The smoke production is measured by use of a light attenuation instrument installed in the exhaust duct alongside the sampling equipment used to measure the heat release. Visual observations are made of the horizontal flame spread and falling of flaming droplets and particles.



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
BTTG™ and Shirley® are trade names of Shirley Technologies Ltd.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2025 Shirley Technologies Limited. All rights reserved.



Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 9 of 15

Client: All Print Supplies Ltd

Mounting Method

Each specimen was mounted using the following conditions:

Method of Mounting/Fixing:	Self Adhered
Test Substrate (as specified in (BS EN 13238):	12mm Calcium Silicate Board (EN 14306)
Adhesive (if applicable):	N/A
Specimen Consisted of Horizontal Joint:	Yes
Specimen Consisted of Vertical Joint:	Yes

Procedure

The test was carried out in accordance with BS EN 13823:2020+A1:2022.

Each specimen was placed in the trolley as per the instructions given and placed underneath the hood in the testing chamber. The volume flow of the exhaust was set to $0.60 \pm 0.05 \text{ m}^3/\text{s}$ and maintained at this throughout the test period.

The temperatures in the exhaust hood and the ambient temperature should be within 4°C with the ambient temperature being within $20 \pm 10^\circ\text{C}$. The other pre-test conditions of ambient pressure and ambient relative humidity were also recorded.

The recording of baseline data is started at 0 s. At 120 s the auxiliary burner is ignited and the propane mass flow adjusted to the specified flow before 150 s, this flow to be kept constant throughout the test.

With the pre-test conditions met, the propane supply is switched from the auxiliary burner to the main burner at 300 s.

The burning behaviour of the specimen was recorded both automatically and visually over a period of 1,260 s from when the main burner was ignited.

At 1560 s the gas supply was terminated along with the automatic recording of the data. The conditions at the end of the test were recorded at least one minute after any remaining combustion has been totally extinguished.

The individual pre-test and baseline conditions, apparatus specifications, test validity criteria, burner details was found to be within specified parameters. The graphs of HRR, HRR(30), THR, FIGRA, SPR, SPR(60), TSP and SMOGRA are found below with the results and classification.



Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 10 of 15

Client: **All Print Supplies Ltd**

Classification Criteria

The samples were classified according to BS EN 13501:2018 Fire classification of Construction Products and Building Elements: Part 1: Classification using Test Data from Reaction to Fire Tests.

For construction products excluding floorings the classes are:

Classification	Classification Criteria (mean values)			
	FIGRA _{0.2MJ} (W/s)	FIGRA _{0.4MJ} (W/s)	LFS	THR _{600s} (MJ)
A2	≤120	N/A	Edge of specimen	≤7.5
B	≤120	N/A	Edge of specimen	≤7.5
C	N/A	≤250	Edge of specimen	≤15
D	N/A	≤750	No requirement	No requirement

To meet classification A2 the sample also has to meet the requirements of either BS EN ISO 1182 or BS EN ISO 1716.

To meet classification B, C and D the sample also has to meet the requirements of BS EN ISO 11925-2.

Additional Classifications - Smoke and Flaming droplets/particles

Classification	Classification Criteria (mean values)	
	SMOGRA (m ² /s ²)	TSP _{600s} (m ²)
s1	≤30	≤50
s2	≤180	≤200
s3	Not s1 or s2	Not s1 or s2
d0	No flaming droplets/particles within 600seconds	
d1	No flaming droplets/particles persisting longer than 10 seconds within 600 seconds	
d2	Not d0 or d1	

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 11 of 15

Client: All Print Supplies Ltd

Results

Classification criteria	Specimen			Mean
	1	2	3	
FIGRA _{0.2MJ} (W/s)	17.3	7.8	12.9	12.7
FIGRA _{0.4MJ} (W/s)	14.9	7.8	12.7	11.8
THR _{600s} (MJ)	1.7	1.1	1.4	1.4
LFS to edge (yes or no)	No	No	No	No
SMOGRA (m ² /s ²)	1.8	1.0	0.9	1.2
TSP _{600s} (m ²)	48.0	43.5	44.5	45.32
FDP flaming ≤ 10 s (yes or no)	No	No	No	No
FDP flaming > 10 s (yes or no)	No	No	No	No

Note


The test results relate to the behaviour of the test specimen of a product under the particular conditions of the test; they are not intended to be the sole criteria for assessing the potential fire hazard of the product in use.


Comment

The results meet the requirements of a probable Class B, s1, d0, but a definite Class B, s2, d0, as specified in BS EN 13501-1:2018.

Where required to make a judgement to any pass/fail criteria an estimation of uncertainty of measurement has been taken into account. Under our Policy we have used a non-binary decision rule.

See our decision rules Policy (<https://www.bttg.co.uk/about-us/decision-rules-policy/>) for further information.

Reported by:  R Greasley, Laboratory Technician

Countersigned by:  A Shute, Section Leader

Enquiries concerning this report should be addressed to Customer Services.



Wira House, West Park Ring Road, Leeds, LS16 6QL, UK.
Telephone: +44 (0) 113 259 1999
Email: onestopshop@bttg.co.uk
Website: www.bttg.co.uk

Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 12 of 15

Client: All Print Supplies Ltd

Uncertainty Budget

The uncertainty budget for BS EN 13501-1:2018 was determined as follows:-

BS EN ISO 11925-2:2020

± 2 seconds for time recorded removal of flame and terminate test and ± 2 mm to measure the distance at 150mm

BS EN 13823:2020+A1:2022

FIGRA 0.2MJ	$\pm 15\%$
FIGRA 0.4MJ	$\pm 15\%$
THR 600s	$\pm 10\%$
SMOGRA	$\pm 15\%$
TSP 600s	$\pm 20\%$



Date: 22 April 2025


Our Ref: 27/06730/03/25
Your Ref: -

Page: 13 of 15

Client: All Print Supplies Ltd

Graphs

Specimen 1

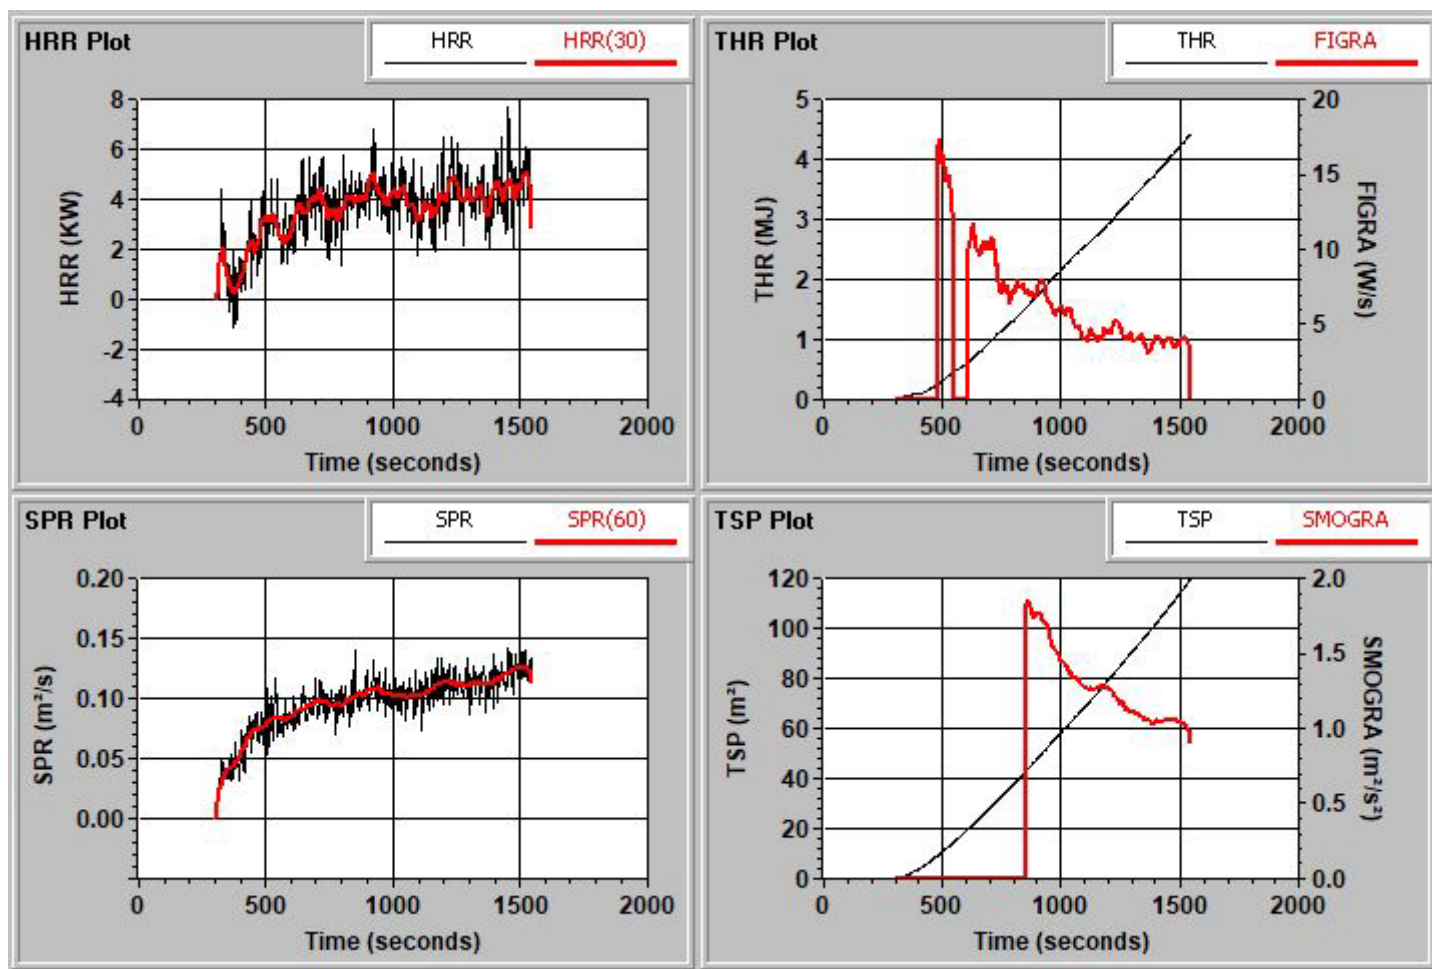


Date: 22 April 2025

Our Ref: 27/06730/03/25
Your Ref: -

Page: 14 of 15

Client: All Print Supplies Ltd

Specimen 2

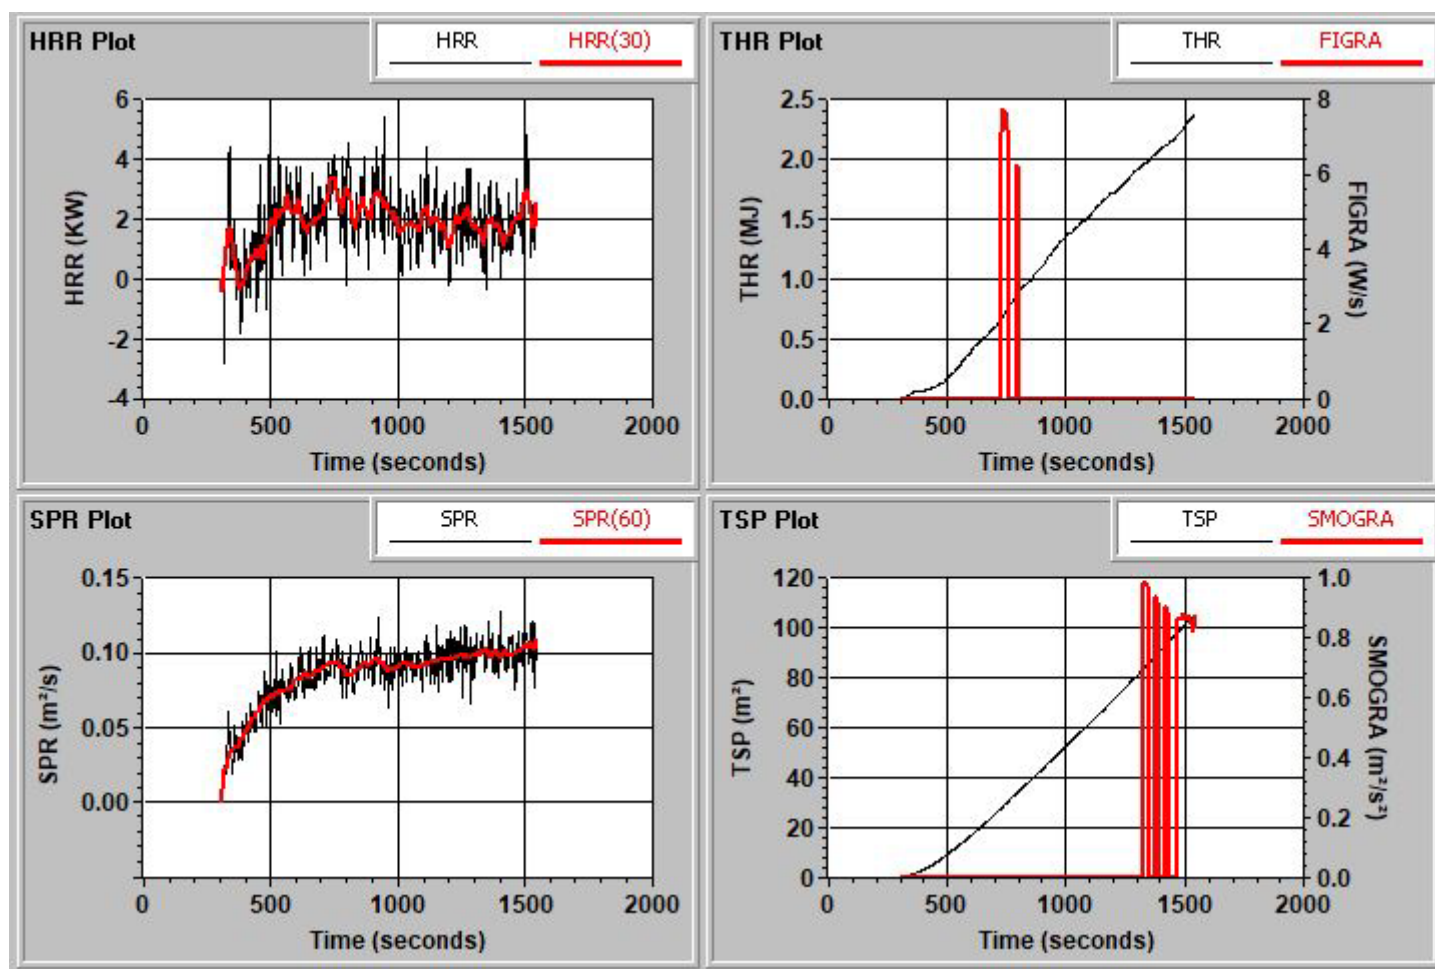

Date: 22 April 2025

Our Ref: 27/06730/03/25

Your Ref: -

Page: 15 of 15

Client: All Print Supplies Ltd

Specimen 3

